



MASTERColour CDM-TC Elite

MASTERColour CDM-TC Elite 35W/930 G8.5 1CT/12

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G8.5 [G8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	12000 h
Life To 10% Failures (Nom)	14000 h
Life to 20% Failures (Nom)	16000 h
Life to 50% Failures (Nom)	20000 h
ANSI Code HID	C130/E

Luminous Flux (Rated) (Nom)	4000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	78 %
Lumen Maintenance 10000 h (Nom)	80 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	102 lm/W
Color Rendering Index (Min)	87

Light Technical	
Color Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Min)	3600 lm

MASTERCcolour CDM-TC Elite

Color Rendering Index (Nom)	90
Operating and Electrical	
Power (Nom)	39.1 W
Lamp Current Run-Up (Max)	1 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	90 V
Voltage (Min)	80 V
Voltage (Nom)	85 V
Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min
Run-Up Time 90% (Nom)	1.5 min
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T14 [T 14 mm]
Approval and Application	
Energy Efficiency Label (EEL)	A+

Mercury (Hg) Content (Nom)	4.7 mg
Energy Consumption kWh/1000 h	43 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3
Luminaire Design Requirements	
Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	300 °C
Product Data	
Full product code	872790091149700
Order product name	MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12
EAN/UPC - Product	8727900911497
Order code	928189105131
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928189105131
Net Weight (Piece)	0.009 kg
ILCOS Code	MT/UB-35/930-H-G8.5-17/85

Dimensional drawing



. D .

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12	15 mm	4.8 mm	51 mm	53 mm	52 mm	85 mm

CDM-TC Elite 35W/930 G8.5

MASTERCoulour CDM-TC Elite



Photometric data

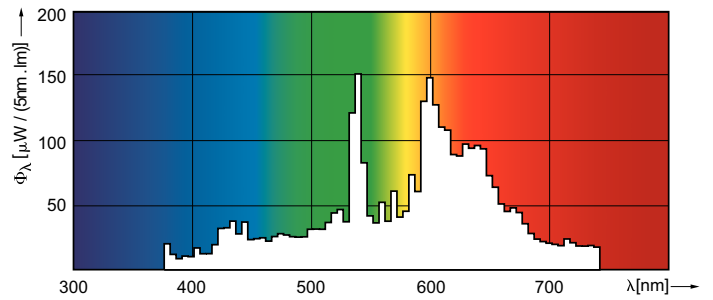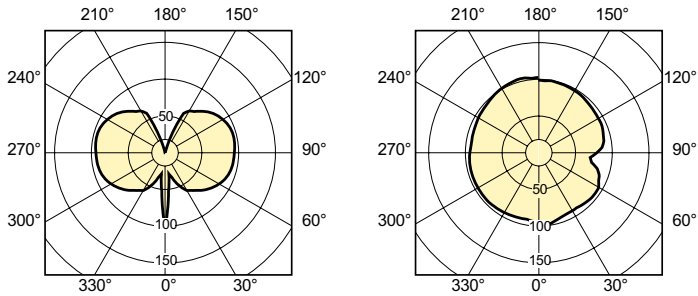

LDLD_CDMTC-E_0001-Light distribution diagram

LDPO_CDMTC-E_0001-Spectral power distribution Colour

Lifetime

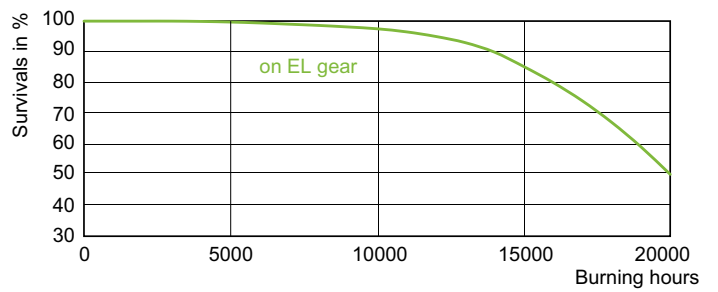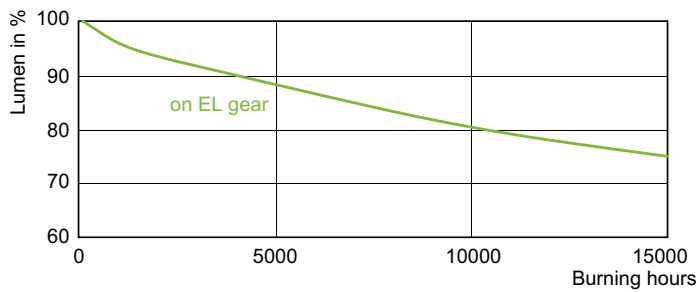

LDLM_CDMTC-E_0001-Lumen maintenance diagram

LDLE_CDMTC-E_0002-Life expectancy diagram

